




# RAPIDO "PRE"

Lightweight, durable, non-deformable designed for making crawl spaces with mild reinforced beams

# RAPIDO "PRE"

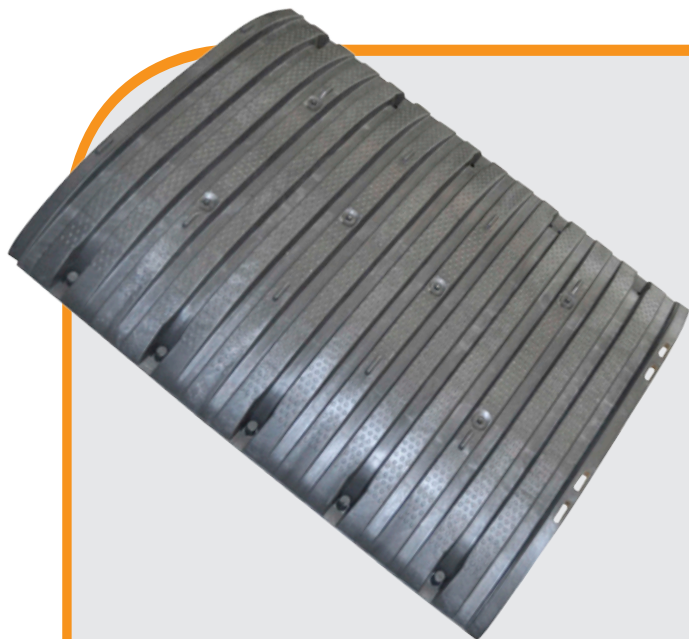

## "RAPIDO PRE"

- the quality of the products used in the production of rapid «PRE», along with its high resistance, make this a high-performance element. The rapid «PRE» is non-deformable and resistant to temperature changes.
- lightweight, with a length of 80 cm, the rapid «PRE» is easy to lay.
- Produced with 100% recycled materials, the rapid "PRE" supports PFB's commitment to remaining in a market that is increasingly more environmentally conscious .
- Used for floors with pre-stressed beams.

## USE

- new buildings and renovations of garages, offices, collective housing, industrial and commercial buildings.



DESCRIPTION	RAPIDO "PRE"		
	LENGTH	WIDTH	HEIGHT
Element dimensions	76,0 cm	58,0 cm	11,0 cm
Useful measurments	75,5 cm	54,0 cm	10,0 cm
Packaging	Pz. 200 = m <sup>2</sup> 88,80		
Weight per pallet	circa Kg. 400,00		
Consumption of skimming concrete	0,027 m <sup>3</sup> /m <sup>2</sup>		
Pallet dimensions	cm 80 x 120 x 240h		



## «PRE» GABLE

- ① holes: pre-cut for the passage of electric wires
- ② quick coupling between «PRE» and its gable
- ③ special self-tapping



①



②



③



## LAYING DIAGRAM

- Quick execution
  - laying the 'PRE' gable between the two beams
  - laying the rapid «PRE» by hooking
- Safety
  - Safe laying thanks to the many supports of rapid «PRE» on the girder
- Cutting
  - If needed, the element can be easily cut with tools already present on site such as a saw or other tools





24050 Mornico Al Serio (BG) - I - Via Fornace  
Tel. +39 035 4490440 - Fax +39 035 4490752

[www.projectforbuilding.com](http://www.projectforbuilding.com) - [info@projectforbuilding.com](mailto:info@projectforbuilding.com)

